


How to set Nikola Tesla Prime and Libra in to Demo-Mode / Come impostare Nikola Tesla Prime e Libra in modalità Demo

Code	Description	Commercial Description	12NC
PRF0138475	NT EVO VALUE 2 SK 3I BL/A/83	NIKOLATESLA PRIME BL/A/83	208355404630
PRF0143159	NT EVO VALUE 2 SK 3I BL/F/83	NIKOLATESLA PRIME BL/F/83	208355404631
PRF0147744	NT EVO LIBRA 2 SK+SCALE UI 3I BL/A/83	NIKOLATESLA LIBRA BL/A/83	208355405316
PRF0147745	NT EVO LIBRA 2 SK+SCALE UI 3I BL/F/83	NIKOLATESLA LIBRA BL/F/83	208355405356
PRF0147774	NT EVO LIBRA 2 SK+SCALE UI 3I WH/A/83	NIKOLATESLA LIBRA WH/A/83	208355405701
PRF0147775	NT EVO LIBRA 2 SK+SCALE UI 3I WH/F/83	NIKOLATESLA LIBRA WH/F/83	208355405702

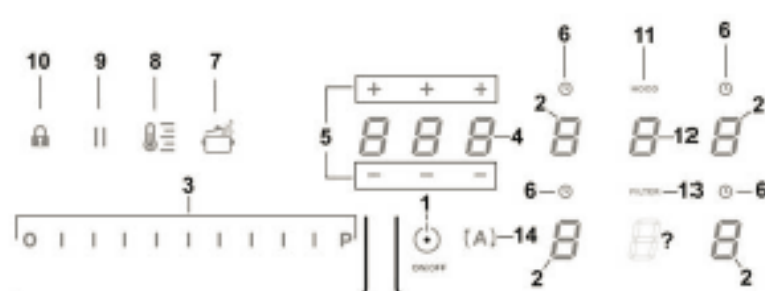

SET DEMO-MODE

When connecting to power supply you have 2 minutes to enter into the sub-menu for setting the hob in to DEMO-Mode.

During connecting to power supply, the symbol "A" (14) is flashing, hold down the button. Now select the single cooking zone (2) starting from front right, rear right, rear left and front left (counter-clockwise direction). Release now the button "A" (14)

At cooking zone (2) at rear left appears letter "C" and "0", press on symbol "C" at rear left and move with the power selection (3) until in cooking zone (2) at rear left appears "6".

In display front left (2) appears now "0", press on cooking zone (2) front left to change the value from "0" to "1", by the slider, to confirm hold down the button On/Off (1) for at least 2 seconds. /

IMPOSTAZIONE DEMO

Quando si connette all'alimentazione si hanno 2 minuti per entrare nel sottomenù e impostare il piano cottura in modalità DEMO.

Durante il collegamento con l'alimentazione, il simbolo "A" (14) lampeggia, tenere premuto il pulsante. Ora, selezionare la singola zona di cottura (2) partendo da anteriore destra, posteriore destra, posteriore sinistra e anteriore sinistra (senso antiorario). Rilasciare ora il pulsante "A" (14)

	00		-
DATE	REV	REVISION DESCRIPTION	REV.PARAGRAPHS ®
APPROVALS			
DATE	REV	VERIFIED BY	APPROVED BY
27/03/2017	00	Designer Thomas Brandt	Project Manager

	ISTRUZIONE OPERATIVA	
		Revision 00 of 03/02/2017
		Page 2 di 3

Nella zona di cottura (2) posteriore sinistra appare la lettera “C” e “0”, premere il simbolo “C” posteriore sinistro e selezionare la potenza (3) finchè non appare “6” nella zona di cottura (2) posteriore sinistra.

Nel display anteriore sinistro (2) ora appare “0”, premere nella zona di cottura (2) anteriore sinistra per cambiare il valore da “0” a “1”, con il comando, per confermare tenere premuto il pulsante On/Off per almeno 2 secondi.

RESET DEMO-MODE

When connecting to power supply you have 2 minutes to enter in to the sub-menu for setting the hob in to DEMO-Mode.

During connecting to power supply the symbol “A” (14) is flashing, hold down the button. Now select the single cooking zone (2) starting from front right, rear right, rear left and front left (counter-clockwise direction). Release now button the “A” (14)

At cooking zone (2) at rear left appears letter “C” and “0”, press on symbol “C” at rear left and move with the power selection (3) until in cooking zone (2) at rear left appears “6”.

In display front left (2) appears now “1”, press on cooking zone (2) front left to change the value from “1” to “0”, by the slider, to confirm hold down the button On/Off (1) for at least 2 seconds. /

RESET DEMO

Quando si connette all'alimentazione, si hanno 2 minuti per entrare nel sottomenù e impostare il piano cottura in modalità DEMO.

Durante il collegamento con l'alimentazione il simbolo “A” (14) lampeggia, tenere premuto il pulsante. Ora, selezionare la singola zona di cottura (2) partendo da anteriore destra, posteriore destra, posteriore sinistra e anteriore sinistra (senso antiorario). Rilasciare ora il pulsante “A” (14)

Nella zona di cottura (2) posteriore sinistra appare la lettera “C” e “0”, premere il simbolo “C” posteriore sinistro e selezionare la potenza (3) finchè non appare “6” nella zona di cottura (2) posteriore sinistra.

Nel display (2) anteriore sinistro appare ora “1”, premere la zona di cottura (2) anteriore sinistra per cambiare il valore da “1” a “0”, con il comando, per confermare tenere premuto il pulsante On/Off per almeno 2 secondi.

	ISTRUZIONE OPERATIVA	
		Revision 00 of 03/02/2017
		Page 3 di 3